

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number
WO 02/069416 A2

(51) International Patent Classification⁷: H01M 4/00

(74) Agents: STEWART, Michael, B. et al.; Rader, Fishman & Grauer PLLC, 39533 Woodward Avenue, Suite 140, Bloomfield Hills, MI 48304 (US).

(21) International Application Number: PCT/US02/05325

(22) International Filing Date: 22 February 2002 (22.02.2002)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MX, MY, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/794,674 27 February 2001 (27.02.2001) US

(71) Applicant (*for all designated States except US*): DANA CORPORATION [US/US]; 4500 Dorr Street, Toledo, OH 43697 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): CHEN, Colin, Ching-Ho [US/US]; 5020 N. Tamarack Drive, Barrington, IL 60010 (US). POPIELAS, Frank, Walter [DE/US]; 1470 Fairway Drive, #202, Naperville, IL 60563 (US). SHAH, Kanu, G. [US/US]; 1932 N. Brighton Place, Arlington Heights, IL 60004 (US). PERSON, Dennis, F. [US/US]; 1820 East Gate Parkway, Rockford, IL 61108 (US).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FUEL CELL PLATE WITH VARIABLE THICKNESS SEALING BEADS

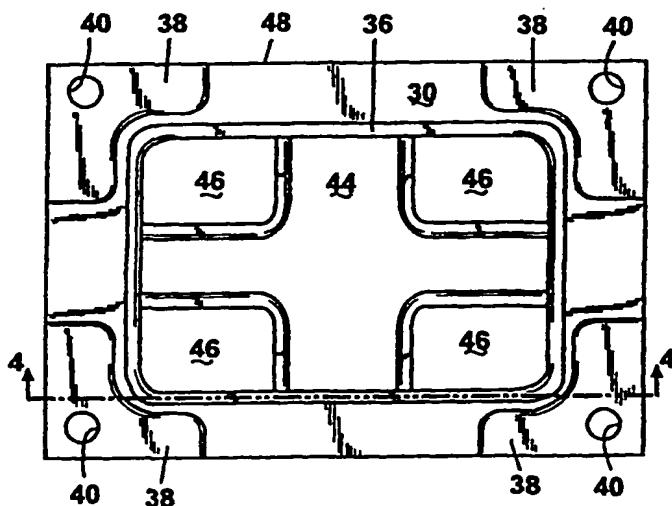

(57) Abstract: A fuel cell apparatus includes at least two facing, parallel plates, stacked together but spaced apart by resilient sealing beads disposed on at least one of the plates. The resilient sealing beads are adapted to facilitate control of fluid flows, such as electrolytes, between the plates and are thus called fluid sealing beads. Each plate contains at least one bolt aperture for securement of the two plates together in the described facing, yet spaced apart, arrangement. Separate beads disposed about the aperture(s) act as aperture load compensation beads. In one preferred embodiment, the fluid sealing beads have one uniform thickness, while the aperture compensation beads have another thickness less than that of the fluid sealing beads. In the same embodiment, the aperture compensation beads are wider, however, than the fluid sealing beads. In another embodiment, the thicknesses of the fluid sealing beads may be varied as a function of proximity of any portion of the fluid bead to

the bolt hole apertures, with the thickness of aperture beads being less to accommodate anticipated normally higher stress loads at bolted connections. The invention thus results in an improved load stress distribution over the mated plates, as bolt loading is thereby more uniformly spread over the plate areas.

WO 02/069416 A2

FUEL CELL PLATE WITH VARIABLE THICKNESS SEALING BEADS**BACKGROUND OF THE INVENTION****Field of Invention**

The present invention relates to improved fuel cell assemblies for generating power,
5 and more particularly to improved sealing structures applied to individual fuel cell plates
secured together via bolted connections.

Description of the Prior Art

It is known to apply resilient sealing beads to the faces of fuel cell plates for control
of fluid flows between a plurality of such plates stacked and bolted together for such
10 purpose. In a typical fuel cell arrangement, pluralities of such plates are sandwiched
together in a parallel, face-to-face pattern during the conventional assembly of a fuel cell
apparatus. The plates are held spaced apart by resilient sealing beads adhesively bonded to
the face of at least one of any two adjoining plates. The sealing beads define paths or
channels for fluids to flow between the plates, and thus fluid electrolytes are used to
15 transfer energy in this manner as will be appreciated by those skilled in the art.

The cell plates employed in the usual fuel cell are brittle, as they are typically
formed of composites that include graphite. Thus, special care must be taken with respect
to the handling of the plates during fuel cell construction, manufacture, or repair to assure
that the brittle plates will not be damaged or compromised. Such care extends even to the
20 post-manufacture handling of the fuel cell to avoid physically bending or cracking of the
brittle plates.

The brittleness issue is particularly exacerbated by the use of bolted connections
through apertures distributed about the periphery of the stacked plates. In such cases the
apertures may be spaced significant distances from intermediate areas of the plates that
25 contain the fluid sealing beads adapted to control flows of electrolytes between the plates.
Thus, the torquing of the bolted connections for securement of the plates together may
actually introduce bending moments in the plates, as the intermediately positioned fluid
sealing beads tend to counteract the tightening of bolts about the peripheral edges of the

plates. Such moments tend to eventually lead to cracking of the brittle plates, particularly during any post-manufacturing handling of fuel cell structures, as noted.

SUMMARY OF THE INVENTION

The present invention provides an improved fuel cell plate construction, wherein
5 sealing bead thickness is controlled over the surface area of the plate, including those areas about bolt apertures used for securing the plates together, in an effort to alleviate over-stressing or cracking of the normally brittle plates. Thus, a plurality of parallel, stacked plates which incorporate the present invention are separated by a plurality of discrete sealing beads disposed over at least one of any two facing plates. In a preferred form, the
10 sealing beads are applied to the faces of the plates by screen-printing techniques to produce accurate thicknesses. The sealing beads are resilient, preferably formed of an elastomeric material, and have varied thicknesses or plate surface heights to accommodate variations in stress levels produced when such plates are bolted together under conventional fuel cell manufacturing techniques. Thus, upon installation of a plurality of fuel cell plates together
15 via bolted connections, the beads are adapted to maintain desired separations between the stacked plates.

To the extent that the highest localized stress areas typically occur in regions immediately adjacent bolt apertures, this invention provides for sealing beads of lower heights or thicknesses about the bolt apertures than for the fluid sealing beads spaced away
20 from the bolt apertures and normally adapted to accommodate fluid flows. In the same preferred embodiment, the sealing beads about the bolt apertures are wider, though of lesser thickness, than the fluid sealing beads. Thus, the fuel cell plates of this invention have compensating thicknesses and widths of the sealing beads about the bolt apertures relative to fluid sealing beads that share the same plate, in order to minimize stress
25 fractures and related premature deterioration of the fuel cell plates.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a plan view of a fuel cell plate of the prior art, which includes only fluid sealing beads; i.e. sealing beads only in areas spaced away from, or not associated with, apertures.

Figure 2 is a cross-sectional view along lines 2-2 of Figure 1.

Figure 3 is a plan view of a fuel cell plate of a preferred embodiment of the present invention, which includes sealing beads of varied heights or thicknesses in both fluid path areas as well as around the bolt aperture areas.

Figure 4 is a cross-sectional view along lines 4 – 4 of Figure 3.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring initially to Figures 1 and 2, a prior art fuel cell plate 10 is shown, which includes contiguous lengths of a conventional single fluid sealing bead 16, formed of width and height suitable for appropriate control of electrolyte flows in fluid path areas 18 between the beads, after the plates 10 and 12 have been bolted together. The plate 12 is beadless as shown, though if part of a plurality of fuel cell plates comprising a fuel cell, the plate 12 would likely contain a contiguous bead 16 similar to that disposed on the plate 10.

Referring now specifically to Figure 2, a pair of mated bolt hole apertures 20 of plates 10 and 12 are normally secured together by bolts (not shown). When tightened, the bolts will draw the underside 14 of the upper plate 12 downwardly against the top of the resilient elastomeric bead 16. Those skilled in the art will appreciate that any inadvertent over-torquing of the bolts may over-compress the bead 16, which will cause the bolted areas (20) of the plates 10 and 12, spaced away from the bead 16, to bend together and create undesirable bending stresses in the plates. As noted, such stresses can cause the plates to develop stress cracks, which can ultimately lead to premature failure of the plates, and hence of the associated fuel cell assembly, particularly if the plates are formed of brittle composites, such as those including graphite.

Referring now to Figures 3 and 4, a pair of mated fuel cell plates 30 and 32 is constructed in accordance with one preferred embodiment of the present invention. The bottom plate 30 contains resilient beads 36 and 38, as shown. The top plate 32 is shown beadless for convenience of description, but would also likely contain beads 36 and 38 if incorporated in a stack of parallel graphite plates to form a commercial fuel cell assembly. Fuel cell plates as typically used in the applications as herein described are in the range of one-fourth inch thickness each, and often include grooves (not shown) for facilitating fluid flow.

The beads 36 are called fluid sealing beads, and the contiguous lengths of the beads 36 are adapted for maintaining appropriate fluid channels 44 and 46 between the fuel cell plates 30 and 32 after the latter are bolted together through apertures 40 via bolted connectors (not shown). In a first preferred embodiment, the contiguous fluid sealing beads 36 have a unitary or single thickness "T" as shown in Figure 4. Normally, the thickness "T" would be approximately 0.10 inch.

The beads 38, on the other hand, act as bolt load compensation beads rather than sealing beads. Thus, the beads 38 are called load compensation beads, and for this purpose the beads 38 are disposed about each bolt aperture 40. The beads 38 have a unitary, lesser, thickness "t" to accommodate higher anticipated localized loading at bolted connection areas (40) of the plates 30 and 32. The thickness "t" is approximately 0.05 inch. The beads 38 are also substantially wider than the beads 36 for spreading the higher bolted connection loading over a greater area. Thus the beads 38 are specifically adapted for counteracting plate bending moments associated with the bolting together of the fuel cell plates 30 and 32.

In the described preferred embodiment, the contiguous bead 36 acts as a resilient separation barrier between the plates 32 and 30. The internal borders of the contiguous bead 36 define the described fuel cell electrolyte fluid channels 44 and 46. Such channels 44 and 46 will normally be confined to the medial area of the plates, while the bolt load compensation beads 38 will be normally situated at the apertures 40, disposed about the peripheral edges 48 of the plates 30 and 32. Referring now to Figure 4, it will be appreciated by those skilled in the art that the load compensation beads 38 must be of lesser thickness than the sealing beads 36. Moreover, it will be particularly advantageous if the beads 38 are also wider than the beads 36. Thus, thinner but wider bolt aperture compensation beads 38 are effective to resist bending of the plates. In order to appreciate this concept intuitively, one has only to reverse the relative thicknesses of the respective beads 36 and 38 as depicted in Figure 4. It will then be fully realized that a thicker bead 38 at the peripheral edges 48 of the plates 30 and 32 would not facilitate securement of the upper plate 32 down against the top of the bead 36 to adequately seal the channels 44 and 46. Indeed, the compression forces created by the bolting of the apertures 40 would remain entirely about the edges 48 of the plates.

Referring now particularly to Figure 3, the deposition of the resilient beads 36 and 38, both preferably of an elastomeric material, is feasibly achieved by screen printing. Those skilled in the art will appreciate that screen printing will accommodate both the thicknesses and the widths required to achieve the proposed configurations.

5 Finally, even though the beads 36 and 38 as described are of uniform thicknesses, this invention contemplates that the beads may alternatively be varied as a function of distance from the bolt apertures. Thus, each bead 36 and 38 could have variable thicknesses, each being adapted to reduce variations in plate stress as a function of proximity of each bolt aperture to any portion of either bead. In each case however, the
10 first sealing bead would have its greatest thickness that points furthest from any one of said apertures, as will be appreciated by those skilled in the art.

 It is to be understood that the above description is intended to be illustrative and not limiting. Many embodiments will be apparent to those of skill in the art upon reading the above description. Therefore, the scope of the invention should be determined, not with
15 reference to the above description, but instead with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

WHAT IS CLAIMED IS:

1. An apparatus comprising at least two plates aligned in parallel, facing yet spaced, proximity to one another, each of said plates comprising at least one bolt aperture, each said aperture of one plate being in alignment with at least one aperture of the other plate, a first resilient bead disposed over a portion of the surface of one of said plates
5 spaced from said apertures, said bead having a first thickness and adapted to comprise a resilient barrier of separation between said plates, and wherein said areas of separation comprise sealed channels between said plates, upon securement of said plates together via bolt members passing through said apertures; a second resilient bead disposed about and adjacent said aperture of said one of said plates, said second resilient bead having a second
10 thickness less than said first thickness of said first bead, said different thicknesses of said first and second beads providing reduced stress level variations throughout the plates upon bolted securement of said plates.
2. The apparatus of claim 1, wherein said resilient beads are comprised of an elastomeric material.
3. The apparatus of claim 2, wherein said second resilient bead is wider than said first bead.
4. The apparatus of claims 3 wherein said plates are fuel cell plates formed of a relatively brittle material.
5. The apparatus of claims 3 wherein said plates are fuel cell plates formed of graphite material.
6. The apparatus of claim 4 wherein a plurality of said fuel cell plates are sandwiched together, each plate having said first and second resilient beads disposed on one side thereof.
7. The apparatus of claim 6 wherein a plurality of said apertures are formed in each plate, wherein the preponderance of said apertures are situated at the edge of any given plate.

8. The apparatus of claim 7 wherein said first and second resilient beads act as fluid sealing beads and aperture bolt load compensation beads, respectively.

9. The apparatus of claim 1 wherein said first and second resilient beads have a plurality of thicknesses, each adapted to reduce variations in plate stress as a function of the proximity of each bolt aperture within said plate to said first resilient bead.

10. The apparatus of claim 9 wherein said bolt apertures are disposed about the periphery of said plates, and wherein the first resilient bead has a thickness that is variable as a function of the proximity of any one of said apertures to said first resilient bead, wherein said first resilient bead has greatest thickness at points furthest from any one of said apertures.

5

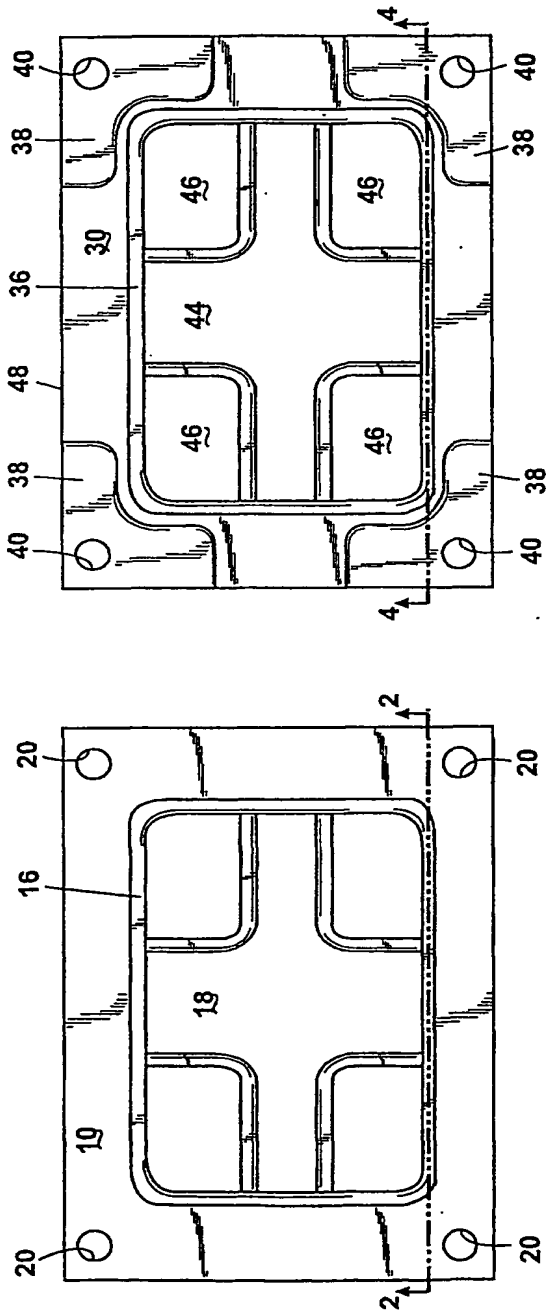


Fig. 1 (PRIOR ART)

Fig. 3

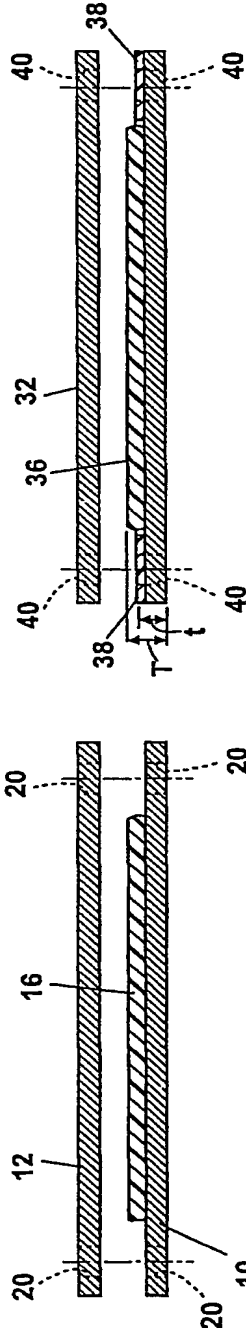


Fig. 2 (PRIOR ART)

Fig. 4

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 September 2002 (06.09.2002)


PCT

(10) International Publication Number
WO 02/069416 A3

- (51) International Patent Classification⁷: H01M 8/02, 8/24
- (21) International Application Number: PCT/US02/05325
- (22) International Filing Date: 22 February 2002 (22.02.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/794,674 27 February 2001 (27.02.2001) US
- (71) Applicant (for all designated States except US): DANA CORPORATION [US/US]; 4500 Dorr Street, Toledo, OH 43697 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): CHEN, Colin, Ching-Ho [US/US]; 5020 N. Tamarack Drive, Barrington, IL 60010 (US). POPIELAS, Frank, Walter [DE/US]; 1470 Fairway Drive, #202, Naperville, IL 60563 (US). SHAH, Kanu, G. [US/US]; 1932 N. Brighton Place, Arlington Heights, IL 60004 (US). PERSON, Dennis, F. [US/US]; 1820 East Gate Parkway, Rockford, IL 61108 (US).
- (74) Agents: STEWART, Michael, B. et al.; Rader, Fishman & Grauer PLLC, 39533 Woodward Avenue, Suite 140, Bloomfield Hills, MI 48304 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: FUEL CELL PLATE WITH VARIABLE THICKNESS SEALING BEADS

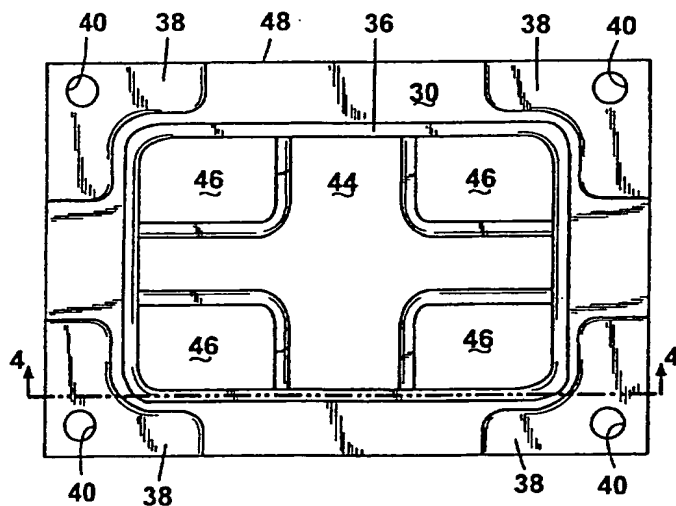

(57) Abstract: A fuel cell apparatus includes at least two facing, parallel plates, stacked together but spaced apart by resilient sealing beads disposed on at least one of the plates. The resilient sealing beads are adapted to facilitate control of fluid flows, such as electrolytes, between the plates and are thus called fluid sealing beads. Each plate contains at least one bolt aperture for securement of the two plates together in the described facing, yet spaced apart, arrangement. Separate beads disposed about the aperture(s) act as aperture load compensation beads. In one preferred embodiment, the fluid sealing beads have one uniform thickness, while the aperture compensation beads have another thickness less than that of the fluid sealing beads. In the same embodiment, the aperture compensation beads are wider, however, than the fluid sealing beads. In another embodiment, the thicknesses of the fluid sealing beads may be varied as a function of proximity of any portion of the

fluid bead to the bolt hole apertures, with the thickness of aperture beads being less to accommodate anticipated normally higher stress loads at bolted connections. The invention thus results in an improved load stress distribution over the mated plates, as bolt loading is thereby more uniformly spread over the plate areas.

WO 02/069416 A3

WO 02/069416 A3



(88) Date of publication of the international search report:
22 May 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/05325

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H01M8/02 H01M8/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EP0-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| A | US 6 057 054 A (GIBB PETER R ET AL) 2 May 2000 (2000-05-02) column 6, line 52 -column 7, line 62 figure 2 | 1-10 |
| A | US 3 320 092 A (ULINE LAWRENCE J) 16 May 1967 (1967-05-16) column 2, line 15 -column 3, line 66 | 1-10 |

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

2 January 2003

Date of mailing of the international search report

13/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Engl, H

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No

PCT/US 02/05325

| Patent document cited in search report | | Publication date | | Patent family member(s) | Publication date |
|---|---|---------------------|----|----------------------------|---------------------|
| US 6057054 | A | 02-05-2000 | US | 6423439 B1 | 23-07-2002 |
| | | | AT | 216138 T | 15-04-2002 |
| | | | AU | 8329398 A | 10-02-1999 |
| | | | CA | 2243355 A1 | 16-01-1999 |
| | | | CA | 2243370 A1 | 16-01-1999 |
| | | | WO | 9904446 A1 | 28-01-1999 |
| | | | DE | 69804829 D1 | 16-05-2002 |
| | | | DE | 69804829 T2 | 07-11-2002 |
| | | | EP | 1156546 A1 | 21-11-2001 |
| | | | EP | 1018177 A1 | 12-07-2000 |
| | | | JP | 2001510932 T | 07-08-2001 |
| | | | US | 6190793 B1 | 20-02-2001 |
| | | | US | 6066409 A | 23-05-2000 |
| | | | US | 6232008 B1 | 15-05-2001 |
| | | | US | 2001019792 A1 | 06-09-2001 |
| US 3320092 | A | 16-05-1967 | BE | 641787 A | 16-04-1964 |
| | | | DE | 1496290 B | 15-01-1970 |
| | | | FR | 1378579 A | 13-11-1964 |
| | | | GB | 1019319 A | 02-02-1966 |
| | | | NL | 302663 A | |